



Handlebars for the long haul

2006-2008 Kawasaki ZX14
Installation Instructions - Part # HC2614

3/4" taller * 3/8" rear set

**WARNING: IMPROPER INSTALLATION COULD RESULT IN SERIOUS INJURY OR DEATH.
HAVE A QUALIFIED MECHANIC INSTALL THIS PRODUCT.**

1. Cover tank and adjoining areas of fairing with a clean sheet or rags to avoid scratches.

Install one adapter at a time. For right side:

2. Remove the socket head cap screws. The stock bolts will not be re-used as the adapters come with longer 50mm screws.
3. Carefully lift and angle the hand grip down slightly to gain access to the fork tube area. Place the appropriate adapter over the fork tube and align the two mounting holes with two threaded holes in the top triple clamp (see diagram provided which describes the proper orientation of the adapters).
4. Carefully position the bar over the adapter and insert two of the longer 50mm screws. Engage the screws into the threaded holes in the top triple clamp. Use a 6mm hex drive socket and torque the two screws to 12 ft. lbs.
5. Repeat steps 2 through 4 above to install the left side adapter.

**!! CAUTION!! BARS MUST BE TORQUED TO SPECIFIED VALUES. THEY MUST NOT BE OVERTORQUED.
OVERTIGHTENED HARDWARE CAN LOSE INTEGRITY.**


For questions regarding installation please call 1-800-859-4642.

**HELI MODIFIED, INC. ASSUMES NO LIABILITY FOR ANY INJURY OR LOSS OF PROPERTY WHICH MAY RESULT IN
IMPROPER USE OF ANY HELI BARS.**

Hel Modified, Inc. P.O. Box 638 - 20 Industrial Way - Cornish, Maine 04020
www.helibars.com

May 25, 2007

Tour Performance handlebar relocation adapters

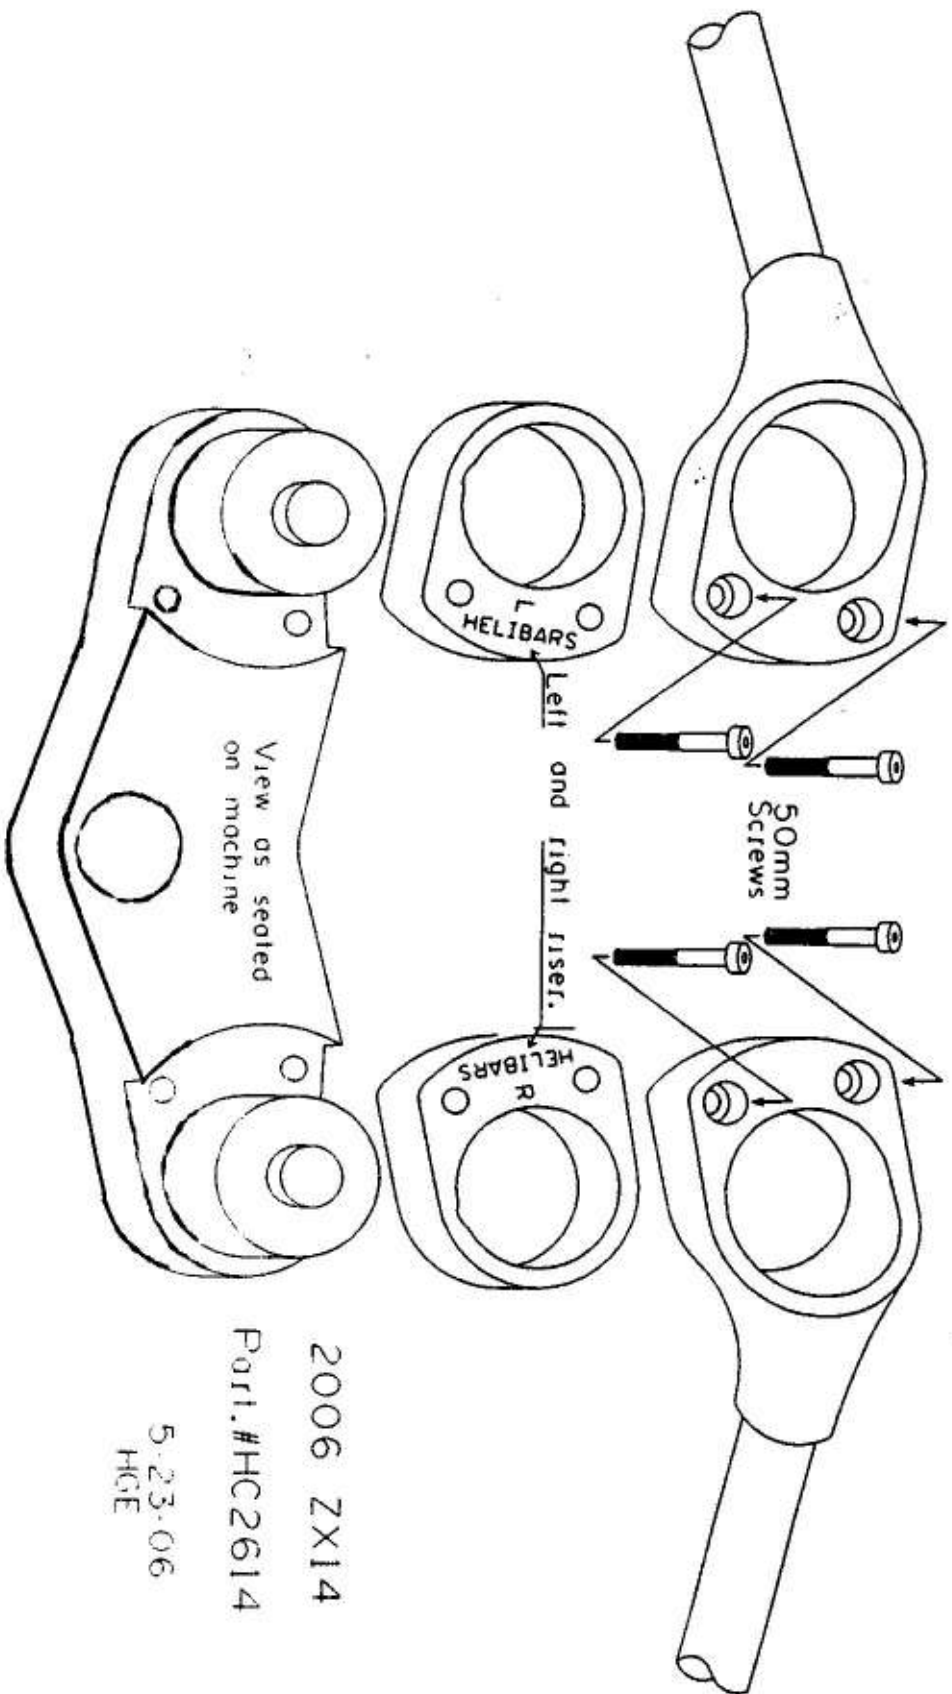

2006 ZX14

Part.#HHC2614

5-23-06
HGE